


## EUROLITE Motor projection screenIR 4:3,3mx2,2m

Screen with motor and remote control

Art.n.: 80901177

GTIN: 4026397414660

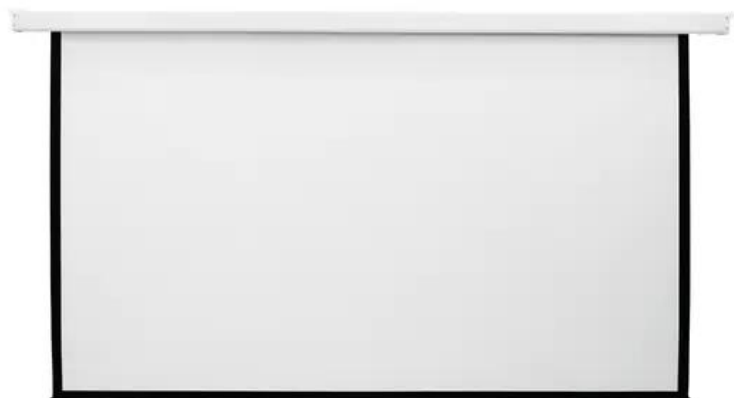

### Descrizione :

Motor screen with IR remote control

Eurolite motorized screens offer you fast installation and high ease of use in a stylish design. High-quality screen material ensures optimum image quality. The screens are perfectly suitable for conference rooms, party rooms or your own living room.

Very good image quality

This screen is ideal for wall or ceiling mounting. The dense cloth material guarantees an even illumination of the picture and ensures vivid colors. Thanks to its black back side, the screen is completely opaque and thus offers an ideal projection surface. A weight bar prevents undulation or movement of the screen. The geared motor is low-noise and has a stepless height adjustment with automatic stop.

Sturdy workmanship, easy operation

The housing is made of white sheet steel and gives the screen a modern look. Operation is very convenient via a permanently mounted switch or the included infrared remote control. The motorized screen is delivered ready for connection with a mains plug.

### Features :

- Motorized Wall Screen for XXL entertainment
- Gain-factor of 1.0 for universal use
- Screen type D (diffuse) for even light reflection
- Matt, white canvas for genuine projections
- Bar-tensioned canvas to keep the fabric flat and immobile

### Logistica

EAN / GTIN: 4026397414660

Peso : 16,50 kg

Lunghezza : 3.55 m

Larghezza : 0.13 m

Altezza : 0.13 m

Merci voluminose

- With surrounding black border
- Suitable for all LCD-beamers and DLP-beamers
- Impervious to light due to black back
- White steel-sheet housing in a modern look
- Operation via low-noise motor
- Stepless height adjustment with automatic endstop
- Stop point top and bottom adjustable via screwdriver
- Controlled via switch or RF remote-control
- For wall or ceiling mounting
- Ready for connection with power plug - no electrician needed!
- For home cinema, party room etc.
- Montaggio a parete; montaggio a soffitto

## Dati tecnici :

|                                      |                                                                                                                                                            |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alimentazione elettrica:             | 230 V AC, 50 Hz                                                                                                                                            |
| Potenza totale installata:           | 30,00 W                                                                                                                                                    |
| Allacciamento elettrico:             | Pavimento cavo di alimentazione con spina di protezione                                                                                                    |
| Formato:                             | 4:3                                                                                                                                                        |
| Telo:                                | Diagonale: (150") circa 3,75 m<br>Dimensione dell'immagine: 300 x 220 cm<br>Gain: 1,0<br>Angolo di visibilità: 100°<br>Tipo di proiezione: sovraproiezione |
| Tempo di svolgimento/riavvolgimento: | 50 s                                                                                                                                                       |
| Tipo installazione:                  | Montaggio a parete; montaggio a soffitto                                                                                                                   |
| Colore:                              | Bianco, opaco                                                                                                                                              |
| Spessore del materiale:              | 0,4 mm                                                                                                                                                     |
| Misure:                              | Larghezza: 350 cm<br>Profondità: 9 cm<br>Altezza: 9 cm                                                                                                     |
| Peso:                                | 12,70 kg                                                                                                                                                   |
| Pila:                                | 1 x 12 V 23AE alcalino-manganese montato                                                                                                                   |
| Deviazione della portante:           | 433,92 MHz                                                                                                                                                 |

## Contenuto della confezione:

- 1 x Dispositivo
- 1 x telecomando
- 1 x Manuale d'uso
- 1 x dichiarazione di conformità
- 1 x Pila
- 2 x viti
- 1 x Supporto