


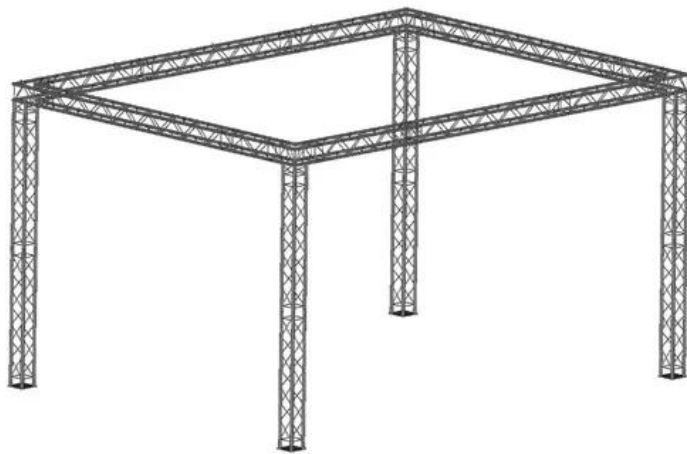

The article is no longer in our assortment.

### Features:

#### ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

#### Package contents

- 2 x connection set

### Logistic

#### ALUTRUSS QUADLOCK End Plate QQGP-Male

- Trusspipe: 50 mm
  - Made in Europe
- cone**
- M8 thread

#### ALUTRUSS QUADLOCK 6082-2500 4-way Cross Beam

4-point truss system

- Strong EN-AW 6082 alloy for high loads

- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

#### **Package contents**

- 1 x connection set

### **Technical specifications:**

|         |           |
|---------|-----------|
| Weight: | 132,40 kg |
|---------|-----------|

#### **ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°**

|        |                   |
|--------|-------------------|
| Setup: | Easy installation |
|--------|-------------------|

|            |              |
|------------|--------------|
| Trusspipe: | 50 mm x 2 mm |
|------------|--------------|

|        |             |
|--------|-------------|
| Color: | Alu colored |
|--------|-------------|

|                             |          |
|-----------------------------|----------|
| Strut diameter x thickness: | 16 x 2mm |
|-----------------------------|----------|

|             |               |
|-------------|---------------|
| Dimensions: | Length: 50 cm |
|             | Width: 50 cm  |
|             | Height: 50 cm |

|         |         |
|---------|---------|
| Weight: | 7,95 kg |
|---------|---------|

#### **ALUTRUSS QUADLOCK End Plate QQGP-Male**

|            |       |
|------------|-------|
| Trusspipe: | 50 mm |
|------------|-------|

|        |             |
|--------|-------------|
| Color: | Alu colored |
|--------|-------------|

|         |         |
|---------|---------|
| Weight: | 1,45 kg |
|---------|---------|

|         |           |
|---------|-----------|
| Thread: | M8 thread |
|---------|-----------|

#### **ALUTRUSS QUADLOCK 6082-2500 4-way Cross Beam**

|        |                   |
|--------|-------------------|
| Setup: | Easy installation |
|--------|-------------------|

|            |              |
|------------|--------------|
| Trusspipe: | 50 mm x 2 mm |
|------------|--------------|

|                    |             |
|--------------------|-------------|
| Welding technique: | TIG-welding |
|--------------------|-------------|

|                   |        |
|-------------------|--------|
| Welding material: | AlMg 5 |
|-------------------|--------|

|        |            |
|--------|------------|
| Alloy: | AlMgSi1 T6 |
|--------|------------|

|        |             |
|--------|-------------|
| Color: | Alu colored |
|--------|-------------|

|                             |          |
|-----------------------------|----------|
| Strut diameter x thickness: | 16 x 2mm |
|-----------------------------|----------|

|             |                |
|-------------|----------------|
| Dimensions: | Length: 250 cm |
|             | Width: 29 cm   |
|             | Height: 29 cm  |

|         |          |
|---------|----------|
| Weight: | 11,85 kg |
|---------|----------|