


ALUTRUS Truss set QUADLOCK 6082R U-Figure 7x4x3.5m (WxDxH)

Three-sided Quadlock exhibition stand

Art. No.: 20000384

GTIN: 4026397615593

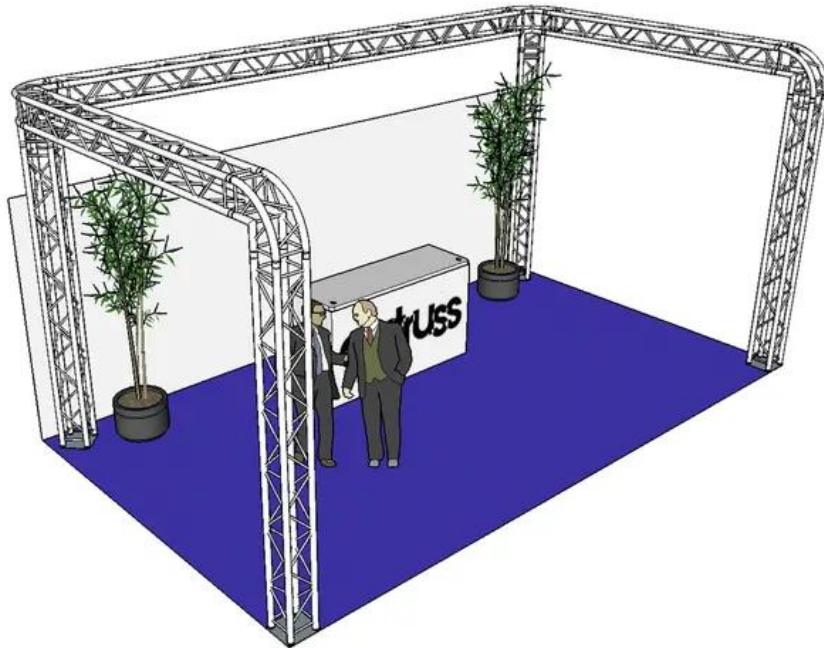

Features:

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"
- <p>ALUTRUS QUADLOCK 6082C-21R 2-way Corner 90°
- <h2 class="featureSatz">4-point truss system</h2>Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- <p>ALUTRUS QUADLOCK 6082C-30R 3-way Corner 90°
- <h2 class="featureSatz">4-point truss system</h2>Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Made in Europe

Logistic

EAN / GTIN: 4026397615593

- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- <p>ALUTRUSS QUICK-LOCK Spare Pivot with Pin
- <h2 class="featureSatz">QUICK-LOCK set</h2>Accessories for the robust truss system with QUICK-LOCK
- For use with TRI/QUAD system
- Trusspipe: 50 mm
- Made in Europe
- <p>ALUTRUSS QUADLOCK End Plate QQGP-Male M-10
- <h2 class="featureSatz">Baseplate for mobile use (connectors 6082 included)</h2>Easy installation
- The article is delivered pre-assembled
- Trusspipe: 50 mm
- Made in Europe
- Application possibility: Standing
half cone
- M10 thread

Technical specifications:

Weight:	147.44 kg
---------	-----------

ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Alloy:	AlMgSi1 T6
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 300 cm Width: 29 cm Height: 29 cm
Weight:	14.2 kg

ALUTRUSS QUADLOCK 6082C-21R 2-way Corner 90°

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 29 cm
Weight:	5.30 kg

ALUTRUSS QUADLOCK 6082C-30R 3-way Corner 90°

Setup:	Easy installation
--------	-------------------

Trusspipe:	50 mm x 2 mm
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 50 cm
Weight:	8.15 kg

ALUTRUSS QUICK-LOCK Spare Pivot with Pin

Trusspipe:	50 mm
Color:	Alu colored
Weight:	0.09 kg

ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

Setup:	Easy installation
Trusspipe:	50 mm
Material:	Aluminum
Color:	Alu colored
Dimensions:	Length: 30.7 cm Width: 30.7 cm Height: 5 cm
Weight:	1.55 kg
Thread:	M10 thread

Scope of delivery:

8 x ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

1 x connection set

2 x ALUTRUSS QUADLOCK 6082C-21R 2-way Corner 90°

1 x connection set

2 x ALUTRUSS QUADLOCK 6082C-30R 3-way Corner 90°

2 x connection set

8 x ALUTRUSS QUICK-LOCK Spare Pivot with Pin

2 x splint

2 x bolt

4 x ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

1 x plate

4 x half cone