


EUROLITE Set 8x AKKU IP PAR 7 QCL WDMX + Case with charging funktion. Art. No.: 20000741

8x IP65 battery-powered spotlight with RGBW LEDs and WDMX incl. PRO flightcase

GTIN: 4026397681543

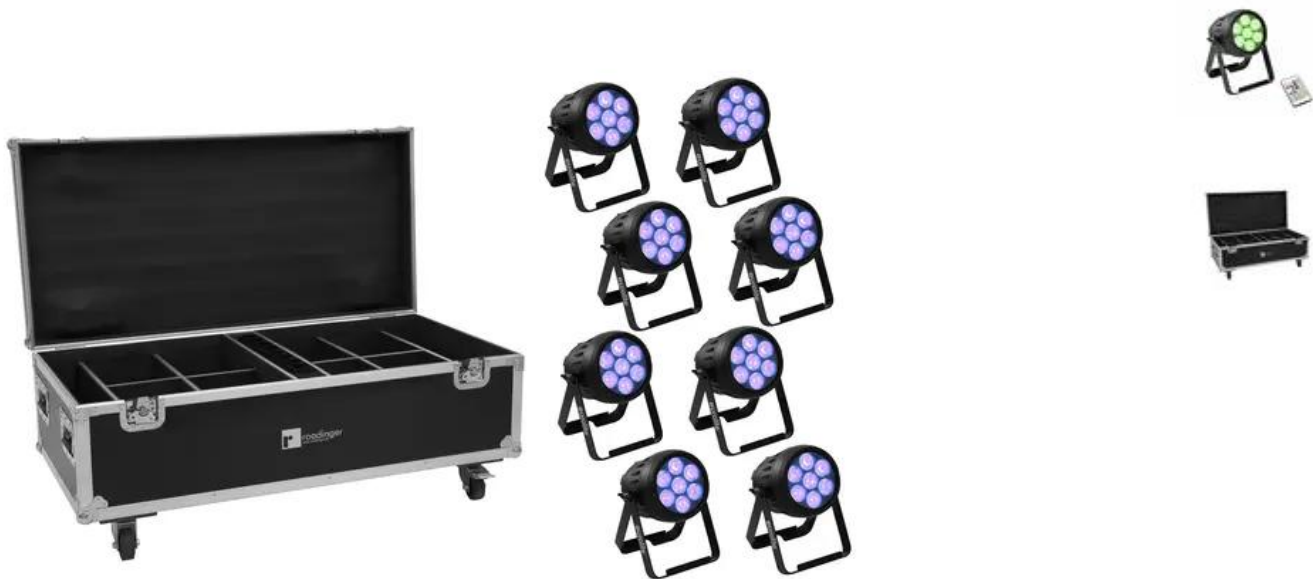

Features:

- Integrated W-DMX transceiver for wireless DMX Control
- Two additional frost filters provide a soft, homogeneous light
- Cordless, flexible and versatile
- Battery operation up to 9h depending on program used
- Integrated automatic charging of the battery and status indicator
- 7 LEDs 8 W SMD 9080 4in1 QCL RGBW (homogenous color mix)
- Emergency lighting function in case of power failure; color blend stepless; color change adjustable; color fade adjustable; Dimmer electronic; Dimmer speed (step response) adjustable; white balance
- Strobe effect
- 36 integrated show programs
- Direct color selection for 15 preset colors
- The device is cooled by passive convection cooling
- Control via DMX; W-DMX by wireless solution; stand-alone; IR remote control; master/slave function; sound to light via microphone
- Fixtures available for EASY SHOW 1; LED EASY OPERATOR 4x4; LED EASY OPERATOR 4x6; LED EASY OPERATOR DELUXE; Light J; Light Captain; EASY SHOW 2; EASY SHOW 3
- Flicker-free
- With a beam angle of 8°
- With double bracket
- OLED display
- Mains input and output for power linking up to 8 units
- Suitable for outdoor use IP65
- With a KENSINGTON LOCK theft protection
- For application areas such as: Wedding/gala/events; mobile use; mobile djs / entertainer; stage
- Silent operation

Logistic

EAN / GTIN: 4026397681543

Weight: 78,00 kg

Length: 1.20 m

Width: 0.80 m

Height: 0.85 m

Bulky product

- Application possibility: Standing; suspended; on stand
- <p>ROADINGER Flightcase 8x AKKU IP PAR 7 QCL WDMX with charging function
- <h2 class="featureSatz">Trunk case with castors</h2>With 8 device compartments
- With accessory compartment
- High-quality workmanship with plywood multi-layer glued 9 mm, black, laminated
- Interior with foam padding
cover with foam padding
- Aluminum profile frames 30mm with rounded edges
- 4 hinged, chromium plated case handles
- 2 chrome tip-over locks
- 2 high-quality butterfly locks with shut-off function
- 4 x castors with 2 locking brakes Ø 100 mm
- 4 x built-in stacking trays in the cover

Technical specifications:

Weight: 69.65 kg

EUROLITE AKKU IP PAR 7 QCL WDMX

Power supply:	100-240 V AC, 50/60 Hz
Power consumption:	70 W
IP classification:	IP65
Protection class:	Protection class I
Power connection:	Battery/battery pack Mains input via IP T-Con (M) mounting version power supply cord with safety plug (provided)
Cable length:	Approx. 1.2 m
Power output:	1 x IP T-Con (F) mounting version
Battery pack type:	1 x lithium ion 25.9 V, 7800 mAh, 202.02 Wh
Battery pack:	Battery operation up to 9h depending on program used Recharging time 4h
Lamp type:	LED lamp
LED type:	7 x 8 W SMD 9080 4in1 QCL RGBW (homogenous color mix)
Flash rate:	1 - 23 Hz
DMX channels:	3; 4; 6; 8; 11
DMX input:	1 x 3-pin XLR (M) mounting version IP
DMX output:	1 x 3-pin XLR (F) mounting version IP
Cooling:	Passive convection cooling
Control:	DMX; W-DMX by wireless solution; stand-alone; IR remote control; master/slave function; sound to light via microphone
Fixtures available for:	EASY SHOW 1; LED EASY OPERATOR 4x4; LED EASY OPERATOR 4x6; LED EASY OPERATOR DELUXE; Light J; Light Captain; EASY SHOW 2; EASY SHOW 3
Projection:	Flicker-free
Carrier frequency:	2.4 GHz

Beam angle:	8°
Beam angle (1/2 peak):	8° Frost filter 15° Frost filter 19°
Beam angle (1/10 peak):	15° Frost filter 31° Frost filter 43°
Housing color:	Black
Attachment system:	Double bracket
Display type:	OLED display
Theft protection:	KENSINGTON LOCK
Dimensions:	Width: 23.4 cm Depth: 28.0 cm Height: 17.0 cm
Weight:	5.25 kg
Noise classification:	Class 0 (no noise at all)
Battery:	1 x button cell 3.0 V CR2032 lithium manganese built-in
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting

ROADINGER Flightcase 8x AKKU IP PAR 7 QCL WDMX with charging function

Power supply:	100-240 V AC, 50/60 Hz
Power connection:	Mains input via IP T-Con (M) mounting version power supply cord with safety plug (provided)
Device fuse:	5 x 20 mm, F 5 A fuse replaceable
Aluminum profile frames:	30 mm
Case handle:	4 pc/pcs
Stop hinge:	2 pc/pcs
Lock:	Butterfly lock: 2 pc/pcs with shut-off function
Transport aid:	4 x castors with 2 locking brakes Ø 100 mm 4 x built-in stacking trays in the cover
Material:	Plywood multi-layer glued, 9 mm
Color:	Black, laminated
Device compartment:	18 cm x 25 cm x 28 cm
Accessory compartment:	9.5 cm x 51.5 cm x 26 cm
Dimensions:	Width: 115 cm Depth: 56 cm Height: 49 cm
Weight:	27.65 kg
Cable construction:	3 x 1.5 mm ² H07RN-F
Cable length:	1.2 m

Scope of delivery:

8 x EUROLITE AKKU IP PAR 7 QCL WDMX

- 1 x device
- 1 x user manual

1 x power cord
1 x remote control
1 x battery
2 x frost filter
2 x screw
1 x declaration of conformity
2 x mounting bracket

1 x ROADINGER Flightcase 8x AKKU IP PAR 7 QCL WDMX with charging function

1 x case
1 x power cord
4 x castors
16 x screw
1 x key
1 x user manual