


## EUROLITE Set 4x LED IP T-Bar 16 QCL Bar + Case

Art. No.: 20000840

GTIN: 4026397690576

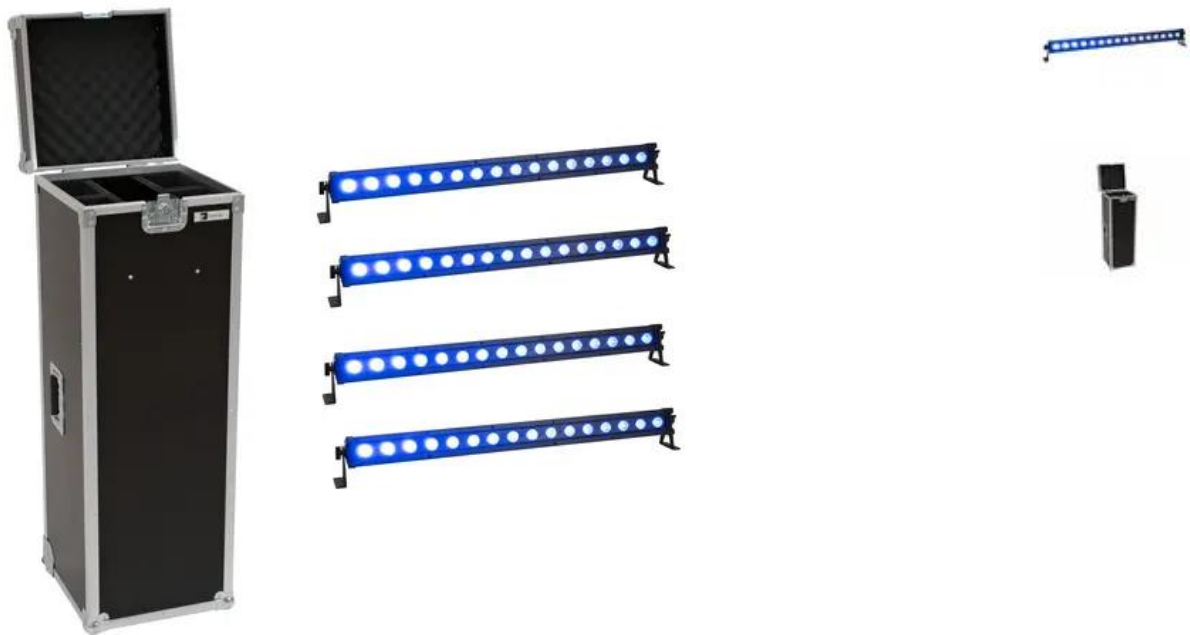

**List price: 1962.31 €**

incl. 19% VAT.

### Features:

#### EUROLITE LED IP T-Bar 16 QCL Bar

Weather-proof (IP65) bar with RGBW color mixing, incl. IR remote control

- 16 powerful LEDs 8 W high-power 4in1 QCL RGBW (homogenous color mix)
- Color blend stepless; color change adjustable; color fade adjustable; Dimmer electronic
- Strobe effect
- Direct color selection for 19 preset colors
- The device is cooled by passive convection cooling
- Control via DMX; master/slave function; stand-alone; IR remote control
- Preprogrammed in Light Captain; EASY SHOW 1; EASY SHOW 2; EASY SHOW 3; Colorchief
- Flicker-free
- With a beam angle of 20°
- With mounting bracket
- 4 digit 7-segment LED display
- Mains input and output for power linking up to 8 units
- Suitable for outdoor use
- For application areas such as: Installation; restaurants, bars and hotels; architecture
- Silent operation
- Application possibility: Suspended; wall mounting

#### Package contents

- 1 x spotlight, 1 x user manual, 1 x power cord, 1 x remote control, 1 x battery, 2 x mounting bracket, 2 x screw, 2 x washer

### Logistic

EAN / GTIN: 4026397690576

Weight: 45,60 kg

Length: 1.20 m

Width: 0.80 m

Height: 0.40 m

Bulky product

### ROADINGER Flightcase 4x LED IP T-Bar 16 QCL Bar

- 6,5 mm,
- Interior with foam padding
- Aluminum profile frames 25mm with rounded edges
- 2 hinged, chromium plated case handles
- 2 chrome tip-over locks
- 1 high-quality butterfly lock
- 2 x trolley
- Branded hardware
- Made in Europe
- For further information about this product, please refer to the Data Sheet under "Downloads"

## Technical specifications:

Weight:	41,65 kg
---------	----------

### EUROLITE LED IP T-Bar 16 QCL Bar

Power supply:	100-240 V AC, 50/60 Hz
Power consumption:	50 W
IP classification:	IP65
Power connection:	Mains input via IP T-Con (M) power supply cord with safety plug
Power output:	IP T-Con (F)
Lamp type:	LED lamp
LED type:	16 x 8 W high-power 4in1 QCL RGBW (homogenous color mix)
Flash rate:	0,8 - 20 Hz
DMX channels:	3; 4; 5; 6; 9
DMX input:	3-pin XLR (M) IP
DMX output:	3-pin XLR (F) IP
Cooling:	Passive convection cooling
Control:	DMX; master/slave function; stand-alone; IR remote control
Preprogrammed in:	Light Captain; EASY SHOW 1; EASY SHOW 2; EASY SHOW 3; Colorchief
Projection:	Flicker-free
Beam angle:	20°
Beam angle (1/2 peak):	20°
Beam angle (1/10 peak):	35°
Housing color:	Black
Attachment system:	2x mounting bracket
Display type:	4 digit 7-segment LED display
Dimensions:	Length: 106,50 cm Depth: 10,00 cm Height: 12,65 cm
Weight:	5,95 kg
Noise classification:	Class 0 (no noise at all)

Photobiological safety:	Risk Group 0
Remote control	
Battery:	1 x button cell 3.0 V CR2025 lithium manganese built-in
Legal specifications	
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting

#### **ROADINGER Flightcase 4x LED IP T-Bar 16 QCL Bar**

Maximum load:	50 kg
Aluminum profile frames:	25 mm
Case handle:	2 pc/pcs
Stop hinge:	2 pc/pcs
Lock:	Butterfly lock: 1 pc/pcs
Transport aid:	2 x trolley
Use of brands:	Branded hardware
Device compartment:	9 cm x 14 cm x 98,5 cm
Accessory compartment:	10 cm x 33 cm x 42,5 cm
Inside dimensions:	28 cm x 33 cm x 98,5 cm
Material thickness:	6,5 mm
Dimensions:	Width: 38 cm Depth: 37 cm Height: 114 cm
Weight:	17,85 kg