


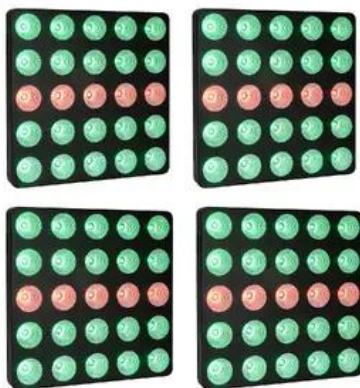

Features:

EUROLITE LED Pixel Matrix Panel 5x5 RGB/WW

Matrix spotlight with RGB/WW LEDs, Pixel control & macros for sequences, letters and numbers

- Create sensational light effect surfaces by connecting several devices
- 25 LEDs 12 W SMD 5050 4in1 QCL RGB/WW (homogenous color mix)
 LEDs controlled separately
- Color change; color fade; color animations with two adjustable colors; Dimmer electronic
- Blinder effect; matrix effect; strobe effect
- 9 integrated show programs
- The device is cooled by temperature-controlled fan
- Control via DMX; stand-alone; RDM; QuickDMX via USB (optional); W-DMX by wireless solution via USB (optional); CRMX by LumenRadio via USB (optional); Art-Net; sound to light; master/slave function
- Fixtures available for Light Captain
- Flicker-free
- DMX fail mode (hold; blackout)
- With a beam angle of 45°
- With mounting bracket
- Multicolor LCD display
- Mains input and output for power linking up to 8 units
- For application areas such as: Stage; clubs/dancing school; wedding/gala/events; mobile djs / entertainer; restaurants, bars and hotels; rental
- Very quiet working noise
- Application possibility: Standing; suspended; on stand

Logistic

EAN / GTIN: 4026397748161

Weight: 70,00 kg

Length: 0.00 m

Width: 0.00 m

Height: 0.00 m

Bulky product

ROADINGER Flightcase 4x Pixel Matrix Panel 5x5 RGB/WW with wheels

Trunk case with castors

- With 4 device compartment
- High-quality workmanship with plywood multi-layer glued 7 mm, black, laminated
- Interior with foam padding
cover with foam padding
- Aluminum profile frames 30mm with rounded edges
- 4 hinged, chromium plated case handles
- 2 chrome tip-over locks
- 2 high-quality butterfly locks
- 4 x castors with 2 locking brakes

Technical specifications:

Weight:	67.00 kg
---------	----------

EUROLITE LED Pixel Matrix Panel 5x5 RGB/WW

Power supply:	100-240 V AC, 50/60 Hz
Power consumption:	115 W
IP classification:	IP20
Protection class:	Protection class I
Power connection:	Mains input via P-Con (blue), mounting version
Cable construction:	3 x 1.0 mm² H05VV-F
Cable length:	1.45 m
Power output:	1 x P-Con (gray), mounting version
Fuse:	5 x 20 mm, T 2 A fuse replaceable
Lamp type:	LED lamp
LED type:	25 x 12 W SMD 5050 4in1 QCL RGB/WW (homogenous color mix)
DMX channels:	4; 10; 15; 100; 102
DMX input:	3-pin XLR (M) mounting version
DMX output:	3-pin XLR (F) mounting version
Network connection:	Protocol: Art-Net 3 via 2x RJ-45 E-Con (F) mounting version
Cooling:	Temperature-controlled fan
Control:	DMX; stand-alone; RDM; QuickDMX via USB (optional); W-DMX by wireless solution via USB (optional); CRMX by LumenRadio via USB (optional); Art-Net; sound to light; master/slave function
Fixtures available for:	Light Captain
Projection:	Flicker-free
DMX fail mode:	Hold; blackout
Beam angle:	45°
Beam angle (1/2 peak):	45°
Beam angle (1/10 peak):	82°

Housing color:	Black
Attachment system:	Mounting bracket
Display type:	Multicolor LCD display
USB port:	Type A
Diameter mounting holes:	3 x Ø10mm
Material:	Metal
Dimensions:	Width: 45.0 cm Depth: 10.6 cm Height: 45.0 cm
Weight:	9.00 kg
Noise classification:	Class 1 (very slight noise, suitable for noise-sensitive environments)
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting

ROADINGER Flightcase 4x Pixel Matrix Panel 5x5 RGB/WW with wheels

Maximum load:	50 kg
Aluminum profile frames:	30 mm
Case handle:	4 pc/pcs
Stop hinge:	2 pc/pcs
Lock:	Butterfly lock: 2 pc/pcs
Transport aid:	4 x castors with 2 locking brakes
Material:	Plywood multi-layer glued, 7 mm
Color:	Black, laminated
Device compartment:	4.5 cm x 45.5 cm x 44.5 cm
Inside dimensions:	61 cm x 45.5 cm x 44.5 cm
Dimensions:	Width: 51.8 cm Depth: 63.3 cm Height: 55.2 cm
Weight:	23.70 kg

Scope of delivery:

- 1 x device
- 1 x user manual
- 1 x power cord
- 2 x safety eyelet