


EUROLITE LED KLS-30 Compact Light Set

DMX LED spotlight set with 12 x 4in1 LED for mobile use

Réf. : 42109603

GTIN: 4026397563641

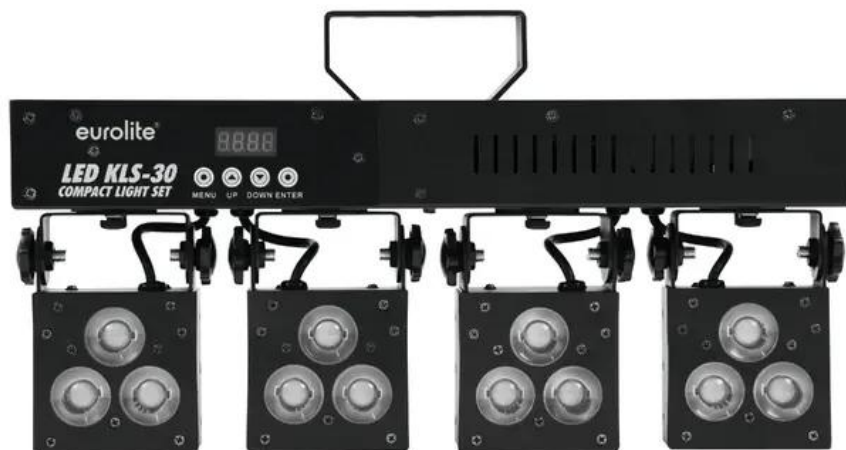

L'article n'est plus disponible.

Caractéristiques:

- Complete LED light set with four compact LED spots
- Crossbar with integrated DMX control unit
- Ultra-light ideally suited for mobile use
- Comes pre-assembled
- 3 QCL LEDs with 4 watts each per spot (RGBW)
- Movable and tiltable spotlights
- DMX-controlled operation or stand-alone operation with Master/Slave function
- 2, 3, 4, 6, 16, 20 or 24 DMX channels selectable
- Sound-control via built-in microphone, microphone sensitivity adjustable
- Supports QuickDMX - the wireless DMX-system from Eurolite
- Built-in phantom fed socket for QuickDMX receiver (see accessories)
- DMX512 control via regular DMX controller
- Via DMX, each spot can be individually controlled
- Functions: RGBW color mixture, color presets, built-in programs, strobe effect with variable speed, dimmer, sound-control, Master/Slave operation
- Addressing and setting via control panel with 4-digit LED display
- Suited for installation on a speaker stand (not included) or truss
- Black lacquered metal version with movable mounting bracket
- Ideal for bands, stages or solo entertainers
- Switch-mode power supply for operation between 100 and 240 volts
- L'appareil est refroidi par refroidissement par convection passive
- Commandé via stand-alone; DMX; QuickDMX
- Déjà préprogrammé pour Light´J; LED PC-Control 512; EASY SHOW 1; Light Captain; EASY SHOW 2; EASY SHOW 3
- Exempt de scintillements
- Avec un Angle de départ de 24°

Logistique

EAN / GTIN: 4026397563641

Poids: 3,85 kg

Longueur: 0.50 m

Largeur: 0.25 m

Hauteur: 0.20 m

Données techniques:

Alimentation électrique:	100-240 V CA, 50/60 Hz
Puissance totale de raccordement:	50 W
Type de protection:	IP20
Type de lampe:	Lampe LED
Refroidissement:	Refroidissement par convection passive
Commande:	Stand-alone; DMX; QuickDMX
Préprogrammé dans:	Light´J; LED PC-Control 512; EASY SHOW 1; Light Captain; EASY SHOW 2; EASY SHOW 3
Projection:	Exempt de scintillements
Angle de départ:	24°
Angle de départ (1/2 pic):	24°
Angle de départ (1/10 pic):	54°
Couleur du boîtier:	Noir
Dimension:	Largeur : 45 cm Profondeur : 12 cm Hauteur : 18,5 cm
Poids:	3,10 kg
DMX channels:	2/3/4/6/16/20/24
DMX connection:	3-pin XLR
QuickDMX connection:	5-pin XLR
Sound control:	via built-in microphone
LED type:	QCL 4 W
Number of LEDs:	12
Beam angle:	24°
Dimensions (L x W x H):	450 x 120 x 185 mm
Spécifications juridiques	
Produit spécial:	Non destiné à l'éclairage de la pièce dans les ménages
Utilisation:	Éclairage pour effets de spectacle