


## EUROLITE LSD-20E IP44 (H)2,56m x (W)1,28m

LED soft displays (economy version)

Réf. : 80503227  
GTIN: 4026397405187

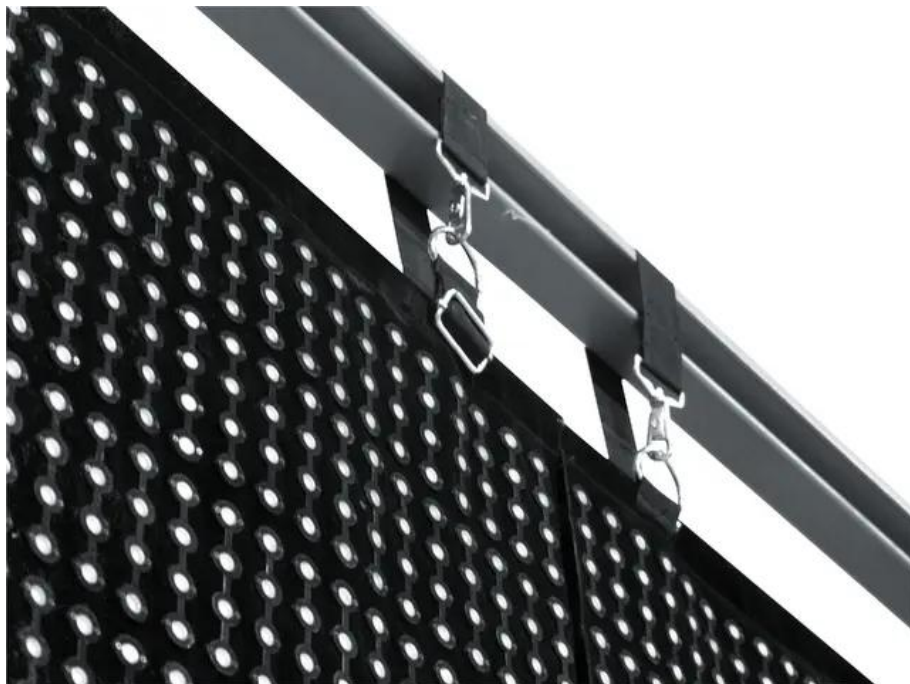

**L'article n'est plus disponible.**

### Caractéristiques:

- Inexpensive economy version of the successful LED soft displays
- Flexible displays with tri-color RGB LEDs (type SMD 3528) for bright and colorful projection of videos and graphics
- Modular display concept allows the build-up of large areas, ideal for outdoor use with large viewing distances
- Bendable and foldable PVC material suitable for various shapes, e.g. columns, circles, angles
- Fast and uncomplicated installation, indoor and outdoor (IP44)
- Truss suspension via built-in belts
- Water-repellent and flame-resistant
- Low weight and small volume for convenient transport
- Easy maintenance - LEDs can be replaced without difficulty
- Controllable via optional network components and PC software
- All-in-one control system T9 (80503300): network interface and software LED Show T9 - ideal system for mobile use with notebooks with 1-gigabit NIC
- Control system LED studio: receiver interface (80503310), PCI sending card and software LED Studio (80503130)
- Recommended media software: MADRIX
- Switch-mode power supply for operation between 100 and 240 Volts
- Power output for passing on the power supply
- Available in different sizes and pixel pitches
- Custom sizes available upon request (in 0.32 m units)
- Vous trouverez de plus amples informations sur ce produit dans la rubrique « Téléchargements » de la fiche technique

### Logistique

EAN / GTIN: 4026397405187  
Poids: 34,00 kg  
Longueur: 1.33 m  
Largeur: 0.68 m  
Hauteur: 0.20 m  
Article encombrant

Données techniques:

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Alimentation électrique:          | 100-240 V CA, 50/60 Hz                                         |
| Puissance totale de raccordement: | 60,00 W                                                        |
| Type de protection:               | IP44                                                           |
| Dimension:                        | Largeur : 128 cm<br>Hauteur : 256 cm                           |
| Poids:                            | 29,19 kg                                                       |
| Resolution (W x H):               | 64 x 128 pixels                                                |
| Pixel pitch:                      | 20 mm                                                          |
| Pixel density:                    | 2500/m²                                                        |
| Pixel configuration:              | tri-color RGB LEDs, type SMD 3528                              |
| Lifetime:                         | approx. 100000 hours                                           |
| Display port:                     | DVI/RJ45                                                       |
| Display mode:                     | synchronous to video source                                    |
| Drive mode:                       | 1/8 scan                                                       |
| Screen resolution:                | max. 1280 x 1024 (LED Studio)<br>max. 1024 x 896 (LED Show T9) |
| Brightness:                       | 940 cd/m² (nits)                                               |
| Viewing angle:                    | 120°                                                           |
| Frame rate:                       | 60 Hz                                                          |
| Data refresh rate:                | 600 Hz                                                         |
| Colors:                           | 16.7 million (R 256, G 256, B 256)                             |
| Protection grade:                 | IP44                                                           |
| Operating temperature:            | -10 to 45 °C                                                   |
| Humidity:                         | 10 to 90 %                                                     |
| Dimensions (W x H):               | 1280 x 2560 mm                                                 |
| Produit spécial:                  | Non destiné à l'éclairage de la pièce dans les ménages         |
| Utilisation:                      | Éclairage pour effets de spectacle                             |