


ALUTRUS QUADLOCK TQ390-2500 Traversa a 4 punti

Sistema di traverse a 4 punti

Art.n.: 60306025

GTIN: 4026397187236

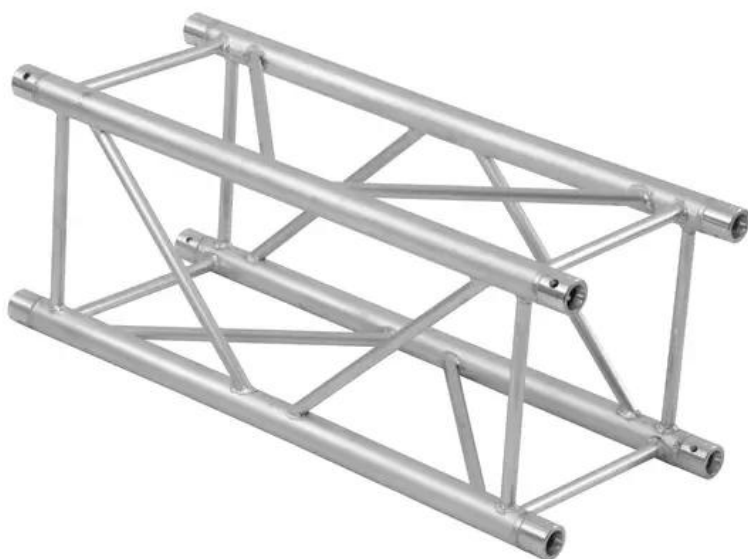

Prezzo di listino: 534.31 €

incl. 19% IVA

Descrizione :

QUADLOCK TQ390 4-point truss system

QUADLOCK TQ390 is a 4-point truss system made of aluminum. The individual elements are connected via four cones, pivots and pins.

The advantage of the conical connection system is that the cones completely fit into the main chords so that highest load capacity is guaranteed. The Quick-Lock system enables fast, efficient and highly aesthetic assembly when the truss constructions are frequently assembled and dismantled.

The four main chords are made of 50 mm aluminum tube with 2 mm wall thickness and offer a good relation between strength and weight. The braces have a diameter of 20 mm with 2 mm wall thickness and provide higher strength and load capacity.

With 390 mm outer dimensions, QUADLOCK TQ390 is a stable truss system for higher loads and extended durability. This system is mainly designed for intense use in stage installations, fair installations, event installations but also for permanent installations in discotheques and theatres.

Due to its higher outer dimensions and the enforced braces, larger structures for tour stages, large discotheques etc. can be realized.

The production of this truss system is TUV-monitored. The load table as calculation base can be downloaded from the Internet before buying the product!

Please note: this truss system must never be combined with other systems!

Logistica

EAN / GTIN: 4026397187236

Peso : 14,64 kg

Lunghezza : 2.50 m

Larghezza : 0.39 m

Altezza : 0.39 m

Merci voluminose

Features :

- Peso leggero
 - Facile da montare
 - Tubo della cinghia: 50 mm
 - Certificato TÜV Süd
 - Per campi di applicazione come, ad esempio,: Teatro; Allestimenti per fiere e negozi; club/scuole di danza
 - Per maggiori informazioni su questo prodotto, consultare "Download" nella scheda tecnica
- Dotazione della fornitura**
- 1 x set di connettori

Dati tecnici :

Struttura:	Facile da montare
Tubo della cinghia:	50 mm x 2 mm
Processo di saldatura:	Impulso TIG
Materiale di saldatura:	AlMg 5
Colore:	Color alluminio
Misure:	Lunghezza: 250 cm Larghezza: 39 cm Altezza: 39 cm
Peso:	13,76 kg